

# Dahua Temperature Monitoring Access Control

Facial Recognition/Temperature Monitoring/Integration



#### Contactless

Non-contact detection and measurement  
**0.3m - 0.8m**



#### High Accuracy

Temperature monitoring accurate to **±0.3°C**



#### Fast Response

Facial recognition **0.2s**  
Temperature monitoring **0.2s**



#### Easy Installation



Rapid installation and flexible deployment



#### Excellent Compatibility


Integration with third party products

## Key Features

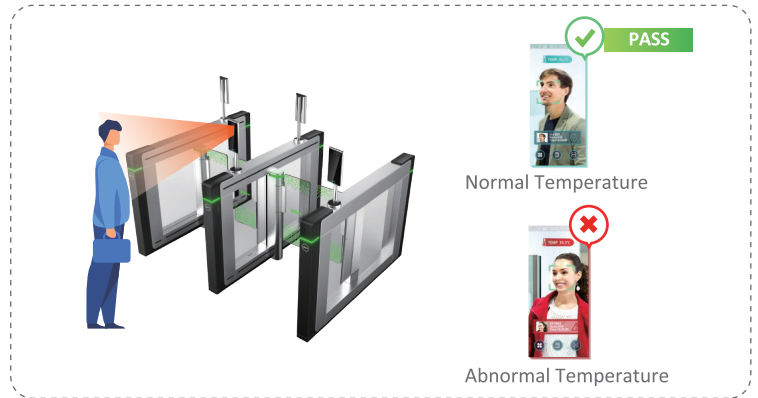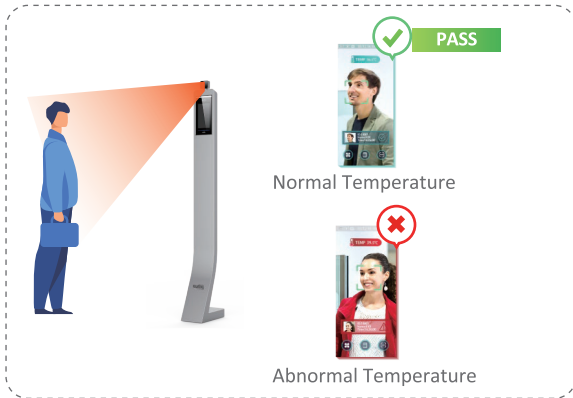


- Facial recognition is fully integrated with body temperature monitoring. This means no additional staff are required.
- The solution is contactless, reducing the risk of cross infection.
- Extensive storage of facial images and temperature information enabling easy historical access.
- Fast facial recognition and temperature monitoring reducing access congestion.
- Integration with third party products such as turnstiles and VMS.

## Example Applications



## Installation Scenarios

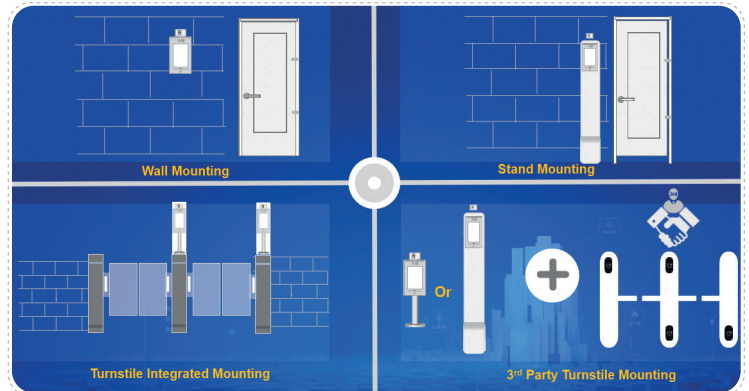

## Solutions

**Wall Mounted: DHI-ASI7223X-A-T1**

**Standing Mount: DHI-ASI7223X-A-T1 + DHI-ASF172X-T1 (Bracket)**

**Terminal + DSS-Express**

- Temperature Accuracy:  $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m~0.8m
- Sound Prompt: Abnormal temperature alarm



**DHI-ASI7223X-A-T1 + DHI-ASGB810X**

**Terminal + Turnstile Stand + DSS-Express**

- Temperature Accuracy:  $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m~0.8m
- Sound Prompt: Abnormal temperature alarm



\* Design and specifications are subject to change without notice.

Ver. 1, May 2020

## DAHUA UK & IRELAND

Quantum House, 60 Norden Road, Maidenhead, Berkshire SL6 4AY  
 Tel: +44 (0) 1628 613 500  
 sales.UK@dahuatech.com  
 support.UK@dahuatech.com

